



SOLENOID PUMP Phoenix Series

MODEL PX76



APPLICATION

Coffee Machines, Floor Cleaning Machines, Steam Ironing Stations

SPECIFICATIONS

Outlet	GAS 1/8"	Power Consumption (Max.)	35W
Fluids	Tap Water / Distilled Water	Operating Voltage	230VAC / 50Hz or 120VAC / 60Hz
Fluid Temperature	35°C	Duty Cycle	ED 100%
Ambient Temperature	35°C	Require External Type Diode	No
Deadhead Pressure	See Performance Chart	Coil Insulation	Class H (180°C) for VDE & Class F (155°C) for UL
Free Flow Rate	See Performance Chart	Terminals	6.3mm x 0.8mm Faston Type


MATERIALS

Plunger	Stainless Steel
Spring	Stainless Steel
Valve	Synthetic Rubber
Seal	Synthetic Rubber
Plastic Parts	PA66 Based Polymer


APPROBATION

VDE (IEC 60335-1, 60335-2-41)
NSF
UL778
CE

PERFORMANCE CURVE

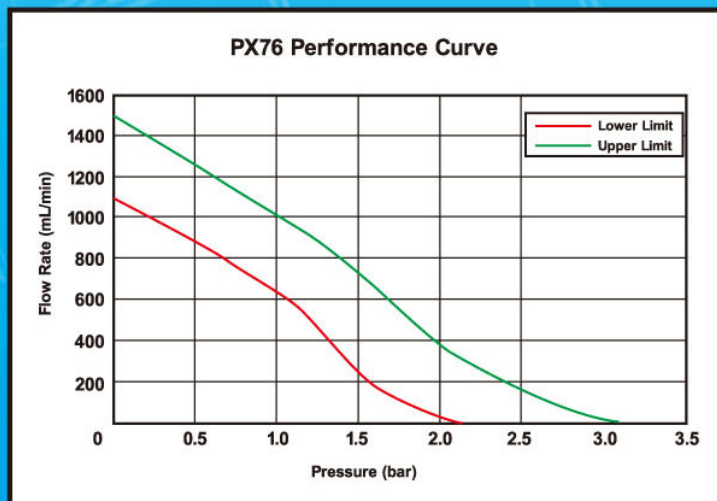

DIMENSIONS

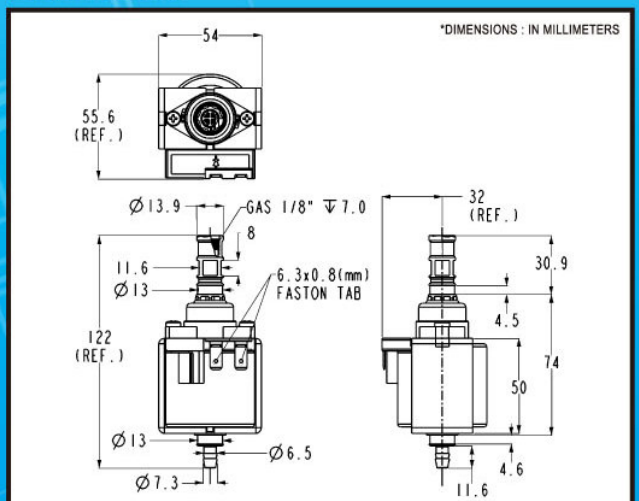

Note: Continuous dry-run would damage the unit permanently.